

LED STREET LIGHT



SERIE PL-750


Product description

- Design life of 30000 hours or more.
- Low heat, electric energy conversion rate in more than 90%.
- The green environmental protection without pollution, cold light source design, no heat radiation.


Application

Street/Landscape

Light Distribution Curve

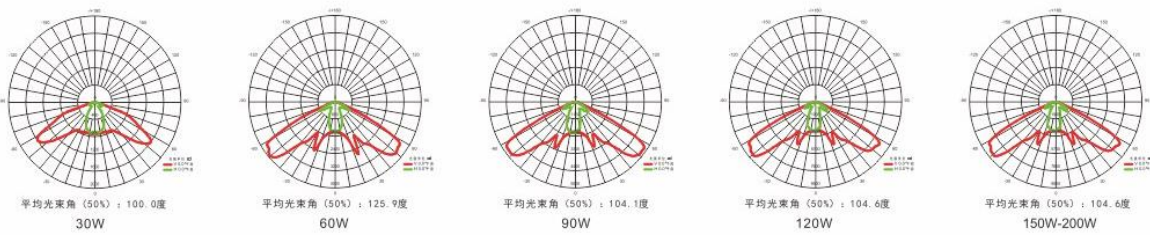


Product dimension

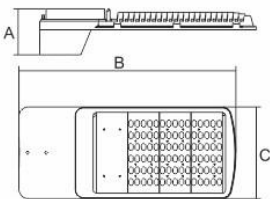

- A117*B405*C215mm 30W
- A134*B500*C267mm 60W
- A134*B632*C267mm 90W-120W
- A137*B632*C310mm 150W-200W

Bracket dimension

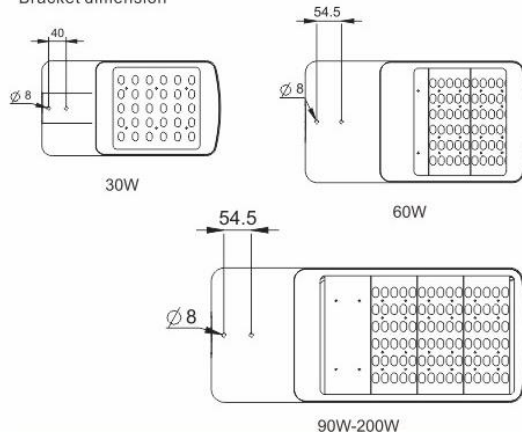

Technical indicators	PL-750-30	PL-750-60	PL-750-90	PL-750-120	PL-750-150	PL-750-200
Rated Power	30W	60W	90W	120W	150W	200W
The Input Voltage	180-240V	180-240V	180-240V	180-240V	180-240V	180-240V
Power factor	≥0.95	≥0.95	≥0.95	≥0.95	≥0.95	≥0.95
Light angle	140°, 70°	140°, 70°	140°, 70°	140°, 70°	140°, 70°	140°, 70°
Color Temperature	3000- 6000K	3000- 6000K	3000- 6000K	3000- 6000K	3000- 6000K	3000- 6000K
The Color Index	70	70	70	70	70	70
Efficiency	90lm/W	90lm/W	90lm/W	90lm/W	90lm/W	90lm/W
Working Temperature	- 20~65°C	- 20~65°C	- 20~65°C	- 20~65°C	- 20~65°C	- 20~65°C
Protection Grade	IP65	IP65	IP65	IP65	IP65	IP65

Dimensions and photos are only referential and can be modified.

Product Warranty: 02 Years with commercial invoice.

Made in China

