



SERIE PL-804







### Feature

- Die casting high-quality aluminum body, toughened glass shade, crash-proof and corrosion resistant.
- Excellent and high-brightness LED light source, high luminous efficiency and CRI, energy saving , lower power ,long lifespan to 30,000 hours.
- Novel appearance, modular structure, simple installation and easy to maintain.


### Application

Spotlight/Stadium

### Light Distribution Curve





### Product dimension

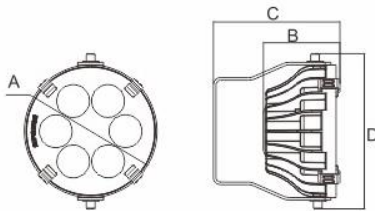

A123\*B91\*C130\*D149mm 6W  
A154\*B89\*C145\*D180mm 12W  
A191\*B95\*C150\*D220mm 18W  
A245\*B96\*C180\*D265mm 36W

### Bracket dimension

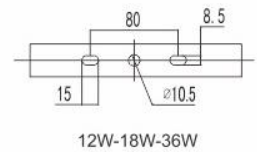

### Technical indicators

Rated Power	6W	12W	18W	36W
The Input Voltage	180-240V	180-240V	180-240V	180-240V
Power factor	≥0.5	≥0.5	≥0.5	≥0.95
Light angle	15°, 15°	15°, 15°	15°, 15°	15°, 15°
Color Temperature	3000- 6000K	3000- 6000K	3000- 6000K	3000- 6000K
The Color Index	70	70	70	70
Efficiency	75lm/W	75lm/W	75lm/W	75lm/W
Working Temperature	- 20~65°C	- 20~65°C	- 20~65°C	- 20~65°C
Protection Grade	IP65	IP65	IP65	IP65

Dimensions and photos are only referential and can be modified.  
Product Warranty: 02 Years with commercial invoice.  
Made in China

